

Husqvarna Soff-Cut 150.



- Non-marking and non-stick polyurethane wheels.
- Retractable front guide system.
- Folding handle.
- Patented safety arbor.
- High strength single piece frame.
- Integrated weight block maintains proper weight balance for a consistent cut.

Technical specifications.

Power	4-1/2 hp*
Blade diameter, in (mm)	6 (152)
Depth of cut, in (mm)	1-3/16 (30)
Weight, lbs (kg)	87 (39)

More technical specifications on page 67. *As rated by the engine manufacturer.

Product specifications.

966844801 , Soff-Cut 150	E	\$2,511
---------------------------------	---	---------

Applications.

- Ultra-early entry concrete cutting system to reduce random cracking.
- Designed for residential and light commercial applications such as driveways and parking lots.

Benefits.

- Gas saw with easy pull start engine.
- Patented low-noise and low-dust blade block enclosure.
- Mechanical blade depth control.


Accessories.

ProEdge height adjustment mechanism for the 150 saw required to use beveled blades P152128	505398101	\$100.00
--	-----------	----------

Spare parts.

Blade belt	505482201	\$23.87
Air filter kit (replacement), 2 pk	505482301	33.92
Pump idler spring (rear)	505482401	27.50
Snapper pins (holds on skid plate)	505482501	19.35
Blade release cable	505482701	110.00
Spark plug (Robin)	505482801	15.68
Blade block cover knobs	505482901	57.00
Blade arbor hex bolt	505483701	1.52
Blade wrench	505483102	7.91

ProEdge beveled blade profiles.

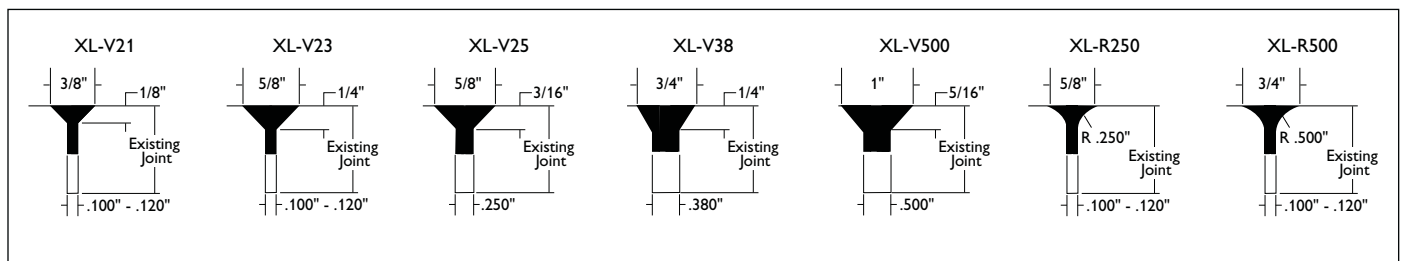

Diamond blades.

MATERIAL	EXCEL 1000 PURPLE	EXCEL 2000 GREEN	EXCEL 3000 RED	EXCEL 4000 ORANGE	EXCEL 5000 YELLOW	EXCEL 6000 BLACK
ULTRA-HARD AGGREGATE, NON-ABRASIVE SAND (FLINT)	●	●	—	—	—	—
HARD AGGREGATE, NON-ABRASIVE SAND (CHERT)	○	●	—	—	—	—
MEDIUM TO HARD AGGREGATE, MEDIUM ABRASIVE SAND (TRAP-ROCK)	○	●	●	●	—	—
MEDIUM AGGREGATE, MEDIUM ABRASIVE SAND (QUARTZ)	—	○	●	●	—	—
MEDIUM TO SOFT AGGREGATE, ABRASIVE SAND (GRANITE)	—	—	○	●	●	●
SOFT AGGREGATE, ABRASIVE SAND (LIMESTONE)	—	—	—	○	●	●
Read more on page	70	70	71	71	72	72

● = Optimal ● = Good ○ = Acceptable — = Not recommended